

Headphone Amplifier PH9B Albatros Audio

Test report

Date : 21 novembre 2006

audio input:

Stéréo XLR-3F with Ground Lift (insolating ground input signal from PH9B)

audio output:

Loop passive XLR-3M (parallel not ground lift)




Headphones output

Two 1/8 jacks and two 1/4 TRS jacks four in parallel




Maximum input level : +26 dBu
 Maximum output level : +21 dBu


Frequency Response (Difference of .5 dB between left-right)
 -1.75 DB à 20 KhZ

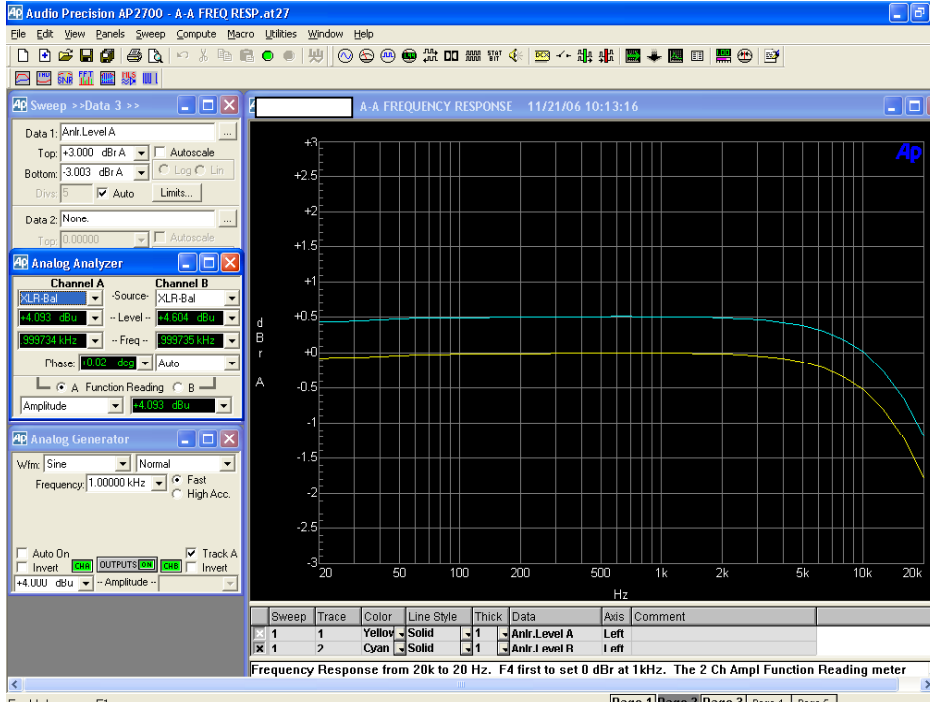


THD+N (excellent)
 .004 % à 1k HZ

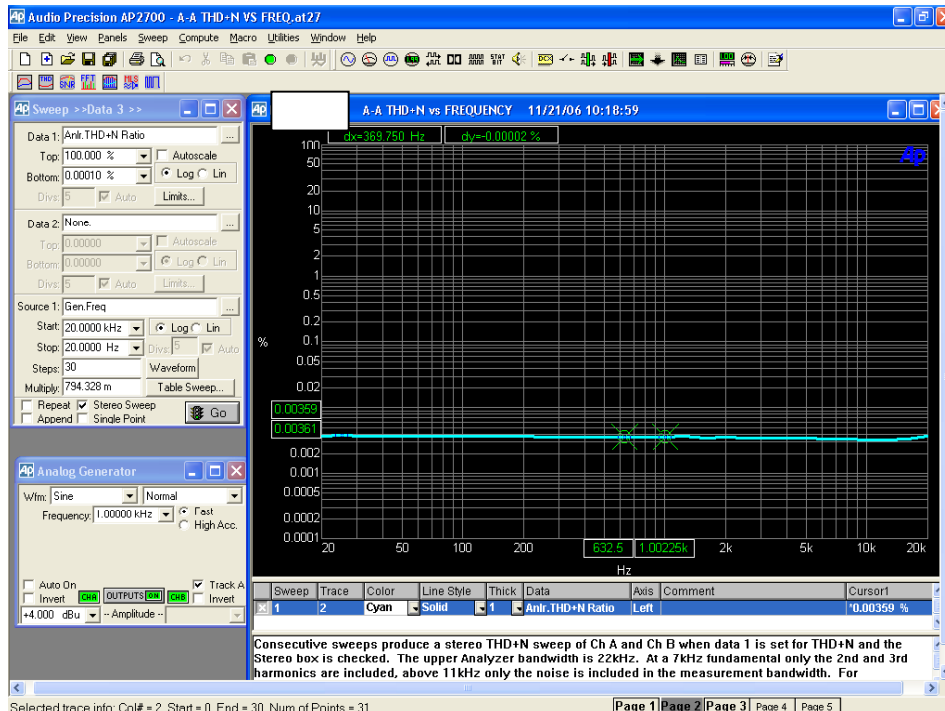

Crosstalk (Good)

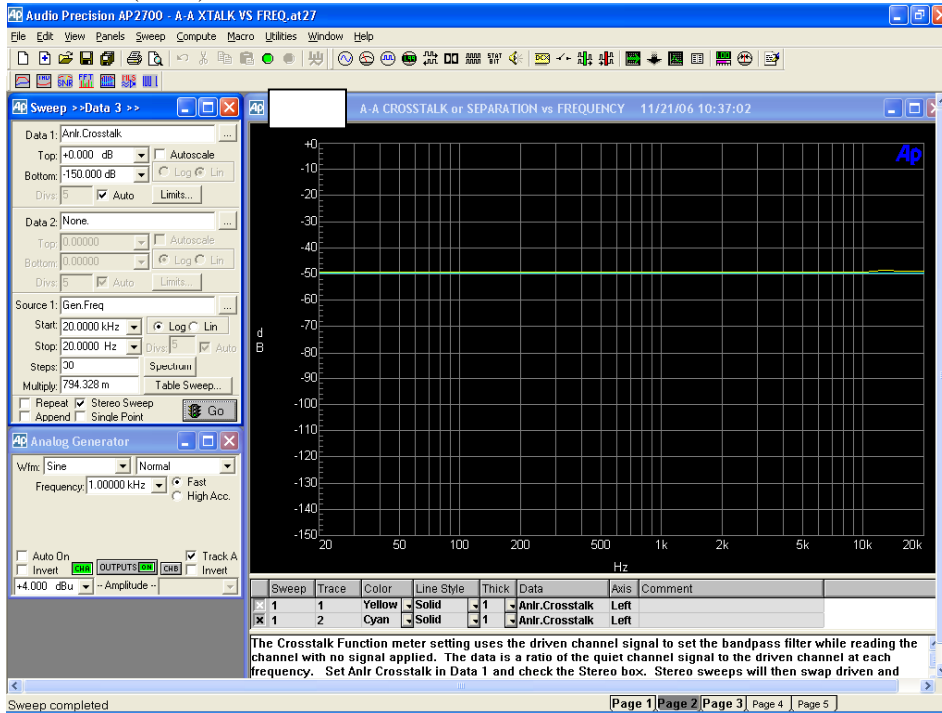

Noise level (Excellent)

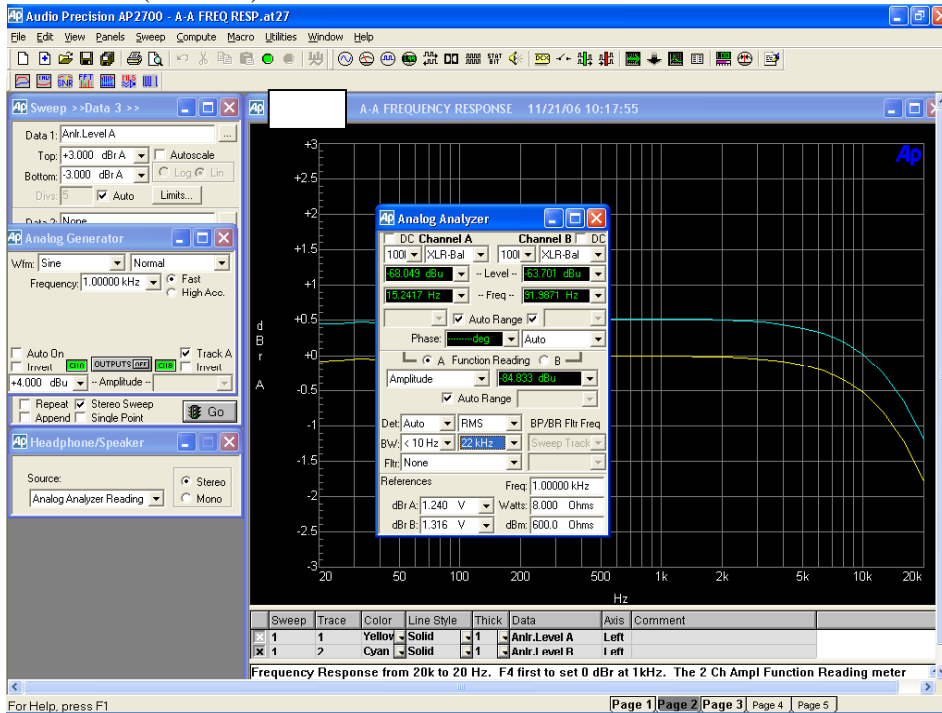

Conclusion : Specs speak by themselves. Have a nice day.